

MARSTEK

Power Anywhere & Anytime

APOLLO SERIES FLEXIBLE SOLAR PANEL

- 110W/pcs, 220W/pcs
- Lightweight, 2kg~3.9kg only
- Easy Installation, Tools-free
- Designed for Balcony, RV, Yacht etc



Marstek Energy Co., Limited

Add: BLDG#A, Changfang Industrial Park, No.2 Guihua 5th Road, Pingshan District, Shenzhen, Guangdong, China

Tel: 86-755-28398778


Email: market@marstekenergy.com

Web: www.marstekenergy.com



Product Manual

SPECIFICATIONS

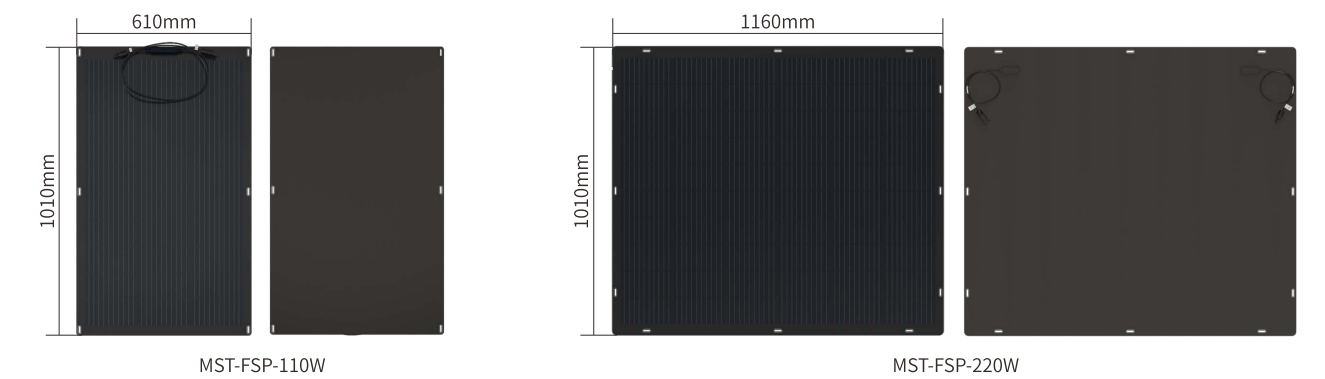

Model Type	MST-FSP-110W	MST-FSP-220W
Specifications		
Maximum Output Power	110W	220W
Power Tolerance	±5%	±5%
Open-circuit Voltage(Voc)	20.81V	20.81V
Short-circuit Current(Isc)	6.48A	12.96A
Voltage at Pmax(Vmp)	17.82V	17.82V
Current at Pmax(Imp)	6.17A	12.35A
Cell Efficiency(%)	23.3%	23.3%
Solar Cell	Single Crystal Prec, A Class	Single Crystal Prec, A Class
Operating Temperature	-20°C ~ 60°C	-20°C ~ 60°C
Expanded Dimensions	610*1010*3mm	1160*1010*3mm
Maximum System Voltage	600VDC	600VDC
Weight	2±0.3kg	3.9±0.3kg
Connector Type	MC4, 900mm, 1.5mm² PV Cable	MC4, 1000mm, 4mm² PV Cable
Certification	CE, Rohs	CE, Rohs

*STC.1000W/m². T=25°C. AM=1.5

Temperature Characteristics	
NOCT(Nominal Operating Cell Temperature)	45 ± 2°C
Temperature Coefficient of Pmax	-0.38%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	0.020%/°C

I-V CURVE

